



**FRESENIUS
KABI**

caring for life

Agilia® Volumat® Lines

Disposables Product Specifications for
Agilia® VP MC WiFi & Volumat MC Agilia®






Volumat[®] Lines available features



- Infusion sets interchangeable for Pump and Gravity use
- Proprietary infusion sets

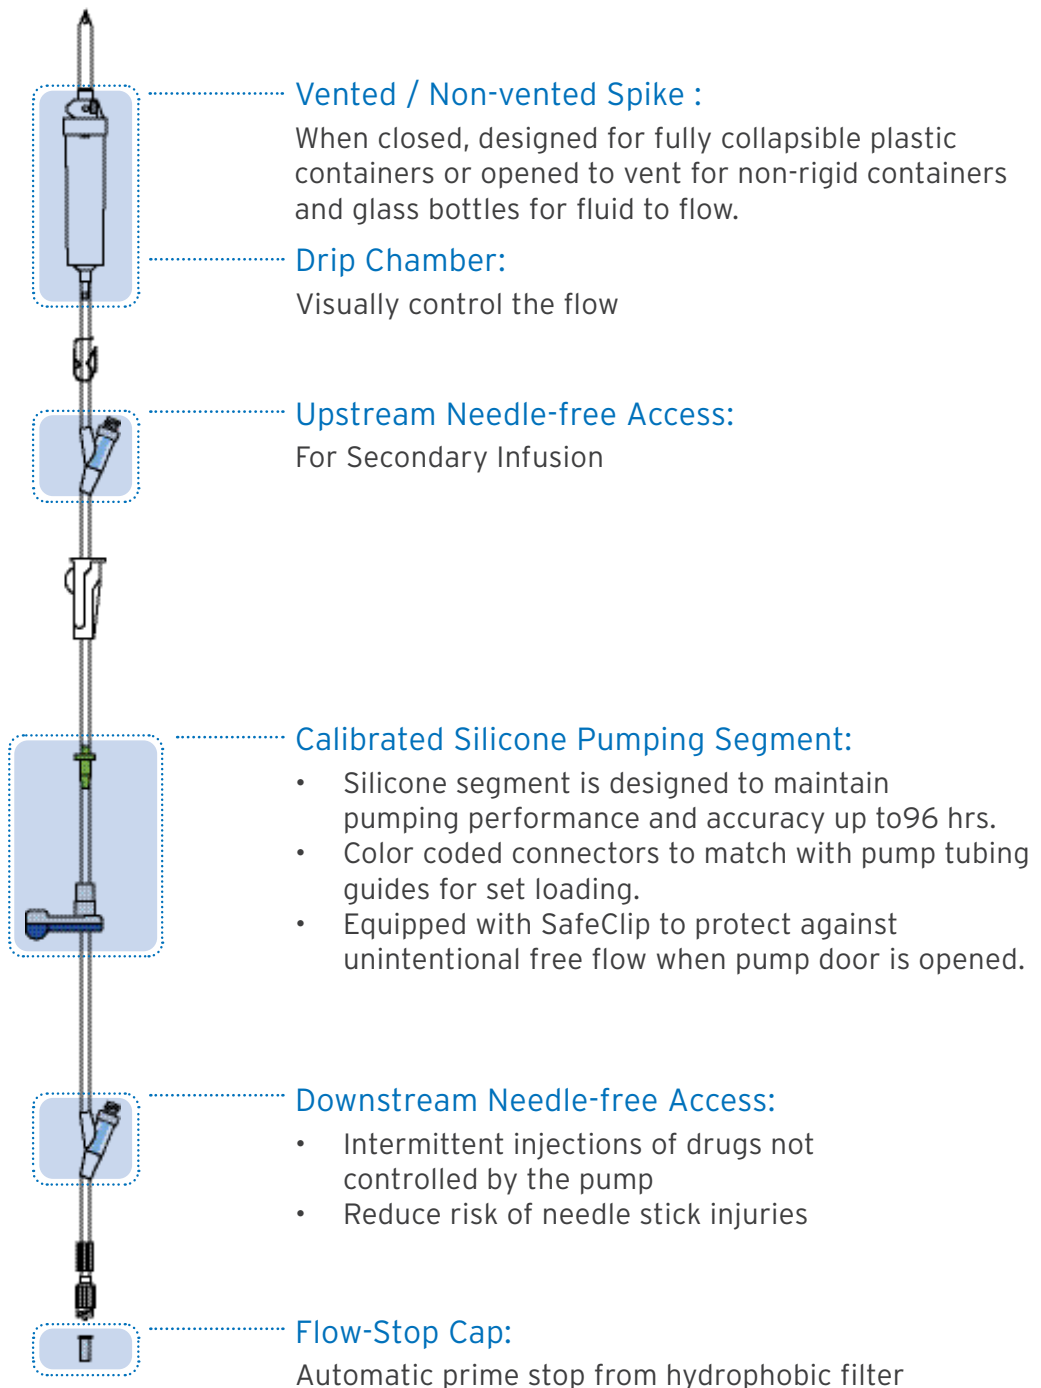

* DEHP as plasticizer is not used

Disposables



Volumat® lines to be used with Agilia® VP MC WiFi, Volumat MC Agilia® or Gravity Infusions.
All sets have upstream roller clamp and rotating male luer lock.

Primary & Standard Sets						
Catalogue number	Description code	Product description	≈ Drops per mL	≈ Priming volume (mL)	≈ Set length (cm / in.)	Pieces per case
M46445465	VL PR40-11	Upstream: pinch clamp, backcheck valve, needlefree port Downstream: pinch clamp, needle free port	20	20	205 / 81	30
M46445665	VL PR42-11	Upstream: pinch clamp, backcheck valve, needlefree port Downstream: pinch clamp, needle free port	20	25	285 / 112	30
M46445695	VL PR42-12	Upstream: pinch clamp, backcheck valve and needle-free port Downstream: pinch clamp, 2 needle-free ports	20	25	285 / 112	30
M46445780	VL PR44-12	Upstream: pinch clamp, backcheck valve, needle-free port Downstream: pinch clamp, 2 needle-free ports 33 in. apart	20	25	285 / 112	30
Standard Sets						
M46441960	VL ST02-0	Downstream: pinch clamp, needle-free port	20	25	285 / 112	30
M46441360	VL ST10-0	No y-site set	20	25	285 / 112	30
Filter Sets						
M46441900S	VL ST02	Upstream: 15 micron filter Downstream: needle-free port	20	25	285 / 112	30
M46442460	VL PN02-1	Downstream: 1.2 micron filter, pinch clamp, needle-free port	20	25	290 / 114	30
M46445865	VL PR72-11	Upstream: pinch clamp, backcheck valve, needle-free port Downstream: 0.2 micron filter, pinch clamp, needle-free port	20	27	285 / 112	30








≈ = Approximate

Transfusion Sets						
Catalogue number	Description code	Product description	≈ Drops per mL	≈ Priming volume (mL)	≈ Set length (cm / in.)	Pieces per case
M46443165	VL SP22-00	Dual spike set Upstream: 200 micron filter	20	25	290 / 114	30
M46442860	VL TR00-0	Single spike set Upstream: 200 micron filter	20	25	285 / 112	30
Light Protected Sets						
M46444900S	VL ON90	Filters light in the UV range of 250/350 nm, PVC-free fluid path No y-site set	20	25	285 / 112	30
M46444901	VL ON91	Filters light in the UV range of 250/350 nm, PVC-free fluid path Downstream: pinch clamp, needle-free port	20	24	255 / 100	30
PVC Free Sets						
M46445475	VL SP40-11	PVC free fluid path set Upstream: pinch clamp, backcheck valve, needlefree port Downstream: pinch clamp, needle free port	20	20	205 / 81	30
M46443450	VL SP62-1	PVC free fluid path set Downstream: pinch clamp and needle-free port	20	25	285 / 112	30
M46444160	VL ON72-1	PVC-free fluid path set Downstream: 0.2 micron filter, pinch clamp, needle-free port	20	26	290 / 114	30
M77460052	VL SL00-XP	PVC-free fluid path Secondary Set Hanger included to lower primary IV fluid bag	20	10.5	70 / 27.5	40
Burette Sets						
M46445260	VL PA92-1	Upstream: pinch clamp, 150 mL burette, needle-free port Downstream: pinch clamp, needle-free port	20	25	300 / 118	10
M46445270	VL PA92-2	Upstream: pinch clamp, 150 mL burette, needle-free port Downstream: pinch clamp, needle-free port	60	20	300 / 118	10
Secondary Set						
M77460034	VL SL00-0	Hanger included to lower primary IV fluid bag	20	12	90 / 35	40









≈ = Approximate

	Primary Sets				Standard Sets	
Catalogue number	M46445465	M46445665	M46445695	M46445780	M46441960	M46441360
Description code	VL PR40-11	VL PR42-11	VL PR42-12	VL PR 44-12	VL ST02-0	VL ST10-0
<p>All sets can be used as gravity lines with the SafeClip in the open position. Regulate flow with the roller clamp.</p> <p>Calibrated silicone pumping segment with Blue SafeClip: anti-free flow SafeClip.</p> <div style="display: flex; justify-content: space-around; align-items: center;">   </div> <p style="text-align: center;"> OPEN CLOSED </p> <p>All sets with upstream roller clamp and rotating male luer lock.</p>						
Spike Vented	•	•	•	•	•	•
Drip Chamber (Upstream/inline)	Upstream	Upstream	Upstream	Upstream	Upstream	Upstream
150mL Vented Burette with Needle-Free Access						
Backcheck Valve	•	•	•	•		
Needle-Free Access	$\frac{1}{1}$	$\frac{1}{1}$	$\frac{1}{2}$	$\frac{1}{2}$	$\frac{0}{1}$	$\frac{0}{0}$
Pinch Clamp (Upstream/Downstream)	Both	Both	Both	Both	Downstream	
Filter (Anti-Bacterial/Air Eliminating)						
Rotating Male Luer Lock	•	•	•	•	•	•
Automatic Flow Stop Cap for easy priming	•	•	•	•	•	•
Not made with natural rubber latex or DEHP	•	•	•	•	•	•
PVC-Free Fluid Path						
≈ Volume (mL)	20	25	25	25	25	25
≈ Set length (cm / in.)	205 / 81	285 / 112	285 / 112	285 / 112	285 / 112	285 / 112
≈ Drops per mL	20	20	20	20	20	20
Number per case	30	30	30	30	30	30





• = Includes; ≈ = Approximate

	Filter Sets			Transfusion Sets	
Catalogue number	M46441900S	M46445865	M46442460	M46443165	M46442860
Description code	VL ST02	VL PR72-11	VL PN02-1	VL SP22-00	VL TR00-0
<p>All sets can be used as gravity lines with the SafeClip in the open position. Regulate flow with the roller clamp.</p> <p>Calibrated silicone pumping segment with Blue SafeClip: anti-free flow SafeClip.</p> <div style="display: flex; justify-content: space-around;">   </div> <p style="text-align: center;"> OPEN CLOSED </p> <p>All sets with upstream roller clamp and rotating male luer lock.</p>					
Spike Vented	•	•	•		
Drip Chamber (Upstream/inline)	Upstream	Upstream	Upstream	Inline	Inline
150mL Vented Burette with Needle-Free Access					
Backcheck Valve		•			
Needle-Free Access	$\frac{\text{Upstream}}{\text{Downstream}}$ $\frac{0}{1}$	$\frac{1}{1}$	$\frac{0}{1}$	$\frac{0}{1}$	$\frac{0}{0}$
Pinch Clamp (Upstream/Downstream)		Both	Downstream		
Filter (Anti-Bacterial/Air Eliminating)	15 Micron	0.2 Micron	1.2 Micron	200 Micron	200 Micron
Rotating Male Luer Lock	•	•	•	•	•
Automatic Flow Stop Cap for easy priming	•	•	•	•	•
Not made with natural rubber latex or DEHP	•	•	•	•	•
PVC-Free Fluid Path					
≈ Volume (mL)	25	27	25	25	25
≈ Set length (cm / in.)	285 / 112	285 / 112	290 / 114	290 / 114	285 / 112
≈ Drops per mL	20	20	20	20	20
Number per case	30	30	30	30	30

• = Includes; ≈ = Approximate

	Light Protected Sets		PVC Free Sets			
Catalogue number	M46444900S	M46444901	M46445475	M46443450	M46444160	M77460052
Description code	VL ON90	VL ON91	VL SP40-11	VL SP62-1	VL ON72-1	VL SLO0-XP
<p>All sets can be used as gravity lines with the SafeClip in the open position. Regulate flow with the roller clamp.</p> <p>Calibrated silicone pumping segment with Blue SafeClip: anti-free flow SafeClip.</p> <div style="display: flex; justify-content: space-around;">   </div> <p style="text-align: center;"> OPEN CLOSED </p> <p>All sets with upstream roller clamp and rotating male luer lock.</p>						
Spike Vented	•	•	•	•	•	•
Drip Chamber (Upstream/inline)	Upstream	Upstream	Upstream	Upstream	Upstream	Upstream
150mL Vented Burette with Needle-Free Access						
Backcheck Valve			•			
Needle-Free Access	$\frac{0}{0}$	$\frac{0}{1}$	$\frac{1}{1}$	$\frac{0}{1}$	$\frac{0}{1}$	$\frac{0}{0}$
Pinch Clamp (Upstream/Downstream)		Downstream	Both	Downstream	Downstream	
Filter (Anti-Bacterial/Air Eliminating)					0.2 Micron	
Rotating Male Luer Lock	•	•	•	•	•	•
Automatic Flow Stop Cap for easy priming	•	•	•	•	•	•
Not made with natural rubber latex or DEHP	•	•	•	•	•	•
PVC-Free Fluid Path	•	•	•	•	•	•
≈ Volume (mL)	25	24	20	25	26	10.5
≈ Set length (cm / in.)	285 / 112	255 / 100	205 / 81	285 / 112	290 / 114	70 / 27.5
≈ Drops per mL	20	20	20	20	20	20
Number per case	30	30	30	30	30	40

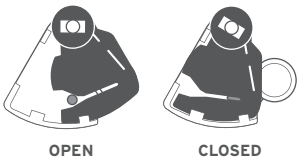• = Includes; ≈ = Approximate

	Burette Sets		Secondary Set
Catalogue number	M46445260	M46445270	M77460034
Description code	VL PA92-1	VL PA92-2	VL SL00-0
<p>All sets can be used as gravity lines with the SafeClip in the open position. Regulate flow with the roller clamp.</p> <p>Calibrated silicone pumping segment with Blue SafeClip: anti-free flow SafeClip.</p>  <p>OPEN CLOSED</p> <p>All sets with upstream roller clamp and rotating male luer lock.</p>			
Spike Vented	•	•	•
Drip Chamber (Upstream/inline)	Inline	Inline	Upstream
150mL Vented Burette with Needle-Free Access	•	•	
Backcheck Valve			
Needle-Free Access	$\frac{\text{Upstream}}{\text{Downstream}} = \frac{1}{1}$	$\frac{\text{Upstream}}{\text{Downstream}} = \frac{1}{1}$	$\frac{0}{0}$
Pinch Clamp (Upstream/Downstream)	Both	Both	
Filter (Anti-Bacterial/Air Eliminating)			
Rotating Male Luer Lock	•	•	•
Automatic Flow Stop Cap for easy priming	•	•	•
Not made with natural rubber latex or DEHP	•	•	•
PVC-Free Fluid Path			
≈ Volume (mL)	25	20	12
≈ Set length (cm / in.)	300 / 118	300 / 118	90 / 35
≈ Drops per mL	20	60	20
Number per case	10	10	40

• = Includes; ≈ = Approximate

All trademarks referred to are property of their respective owners. Copyright(C) 2021 Fresenius Kabi AG. All rights reserved. Due to our policy of continuous product development as well as changes in standards, the features described are subject to change. Please contact us for the most updated information.



Local Contact:
Fresenius Kabi Canada Ltd.
165 Galaxy Boulevard, Suite 100
Toronto, Ontario M9W 0C8 Canada
1-877-779-7760
www.fresenius-kabi.ca

Legal Manufacturer:
Fresenius Kabi AG
61346 Bad Homburg, Germany